


SHURFLO® 2088 SERIES PUMPS

Shurflo 2088 Series Pumps are high flow, low pressure pumps ideally suited for beverage and water applications such as city water pressure boost, portable cart water delivery, batch and transfer of product. These pumps activate automatically as line pressure drops and turns off when a preset pressure is achieved.

- Self-priming up to 12 vertical lift feet [3.7m]
- Used in delivery and transfer applications up to 3.0 GPM [11.4 LPM]
- UL/CSA-recognized components
- Built-in check valve (may vary by model) prevents back flow of fluid
- Automatic turn on / shutoff
- Can run dry without damage
- Customer provided power supply required

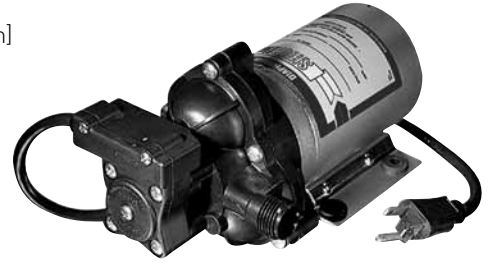

PART NO	DESCRIPTION	PRESSURE		FLOW		AMPS	PACK SIZE	LIST PRICE
		PSI	BAR	GPM	LPM			
2088-443-144	12 VDC, 3.0 GPM [11.4 LPM] open flow, Santoprene® valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14* NPT male ports.	10	0.7	2.80	10.6	5.8	6	\$190.93
		20	1.4	2.50	9.5	7.0		
		30	2.1	2.30	8.7	8.0		
		40	2.8	2.00	7.6	9.1		
2088-474-144	24 VDC, 3.0 GPM [11.4 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14* NPT male ports.	10	0.7	2.80	10.6	2.14	6	192.09
		20	1.4	2.25	8.5	2.63		
		30	2.1	1.75	6.6	2.73		
		40	2.8	1.25	4.7	2.71		
2088-554-144	12 VDC, 3.5 GPM [13.2 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14 NPT male thread, NSF-listed.	10	0.7	2.80	10.7	0.60	6	227.96
		20	1.4	2.50	9.7	0.70		
		30	2.1	2.30	8.7	0.80		
		40	2.8	2.00	7.6	0.85		
2088-564-144	230 VAC, 3.0 GPM [11.4 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14* NPT male ports, NSF-listed, non-corded.	10	0.7	2.80	10.6	0.35	6	244.16
		20	1.4	2.50	9.5	0.45		
		30	2.1	2.20	8.3	0.50		
		40	2.8	2.00	7.6	0.55		
2088-592-054	115 VAC, 2.7 GPM [10.2 LPM], open flow, Santoprene diaphragm, 45 PSI [3.1 BAR] shutoff, NPT male ports, NSF-listed, corded.	10	0.7	2.53	9.6	-	6	164.31
		20	1.4	2.30	8.7	-		
		30	2.1	2.08	7.9	-		
		40	2.8	1.83	6.9	-		
2088-592-094	230 VAC, 3.3 GPM [12.5 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff 1/2"-14 NPT male thread, NSF-listed, painted motor, non-corded.	10	0.7	2.80	10.7	0.37	6	219.86
		20	1.4	2.50	9.7	0.44		
		30	2.1	2.30	8.7	0.49		
2088-594-144	115 VAC, 3.3 GPM [12.5 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14* NPT male ports, NSF-, UL-, and CUL-listed, corded.	10	0.7	2.60	9.8	0.58	6	284.66
		20	1.4	2.34	8.8	0.67		
		30	2.1	2.08	7.9	0.76		
		40	2.8	1.85	6.2	0.94		
2088-594-154	115 VAC, 3.3 GPM [12.5 LPM] open flow, Santoprene valves, Santoprene diaphragm, 45 PSI [3.1 BAR], shutoff, 1/2"-14* NPT male ports, NSF-, UL-, and CUL-recognized, non-corded.	10	0.7	2.60	9.8	0.58	6	219.86
		20	1.4	2.34	8.8	0.67		
		30	2.1	2.08	7.9	0.76		
		40	2.8	1.85	6.2	0.94		
2088-594-500	115 VAC, 3.3 GPM [12.5 LPM] open flow, Santoprene diaphragm, 1/2"-14 NPT male thread, NSF-listed, corded.	10	0.7	2.60	10.0	0.60	6	233.74
		20	1.4	2.30	8.7	0.70		
		30	2.1	2.00	7.6	0.80		
		40	2.8	1.80	6.8	0.85		

* 1/2"-14 thread ports require Shurflo Swivel Fittings.